


-

Deep-Sea Laserpointer Type 2

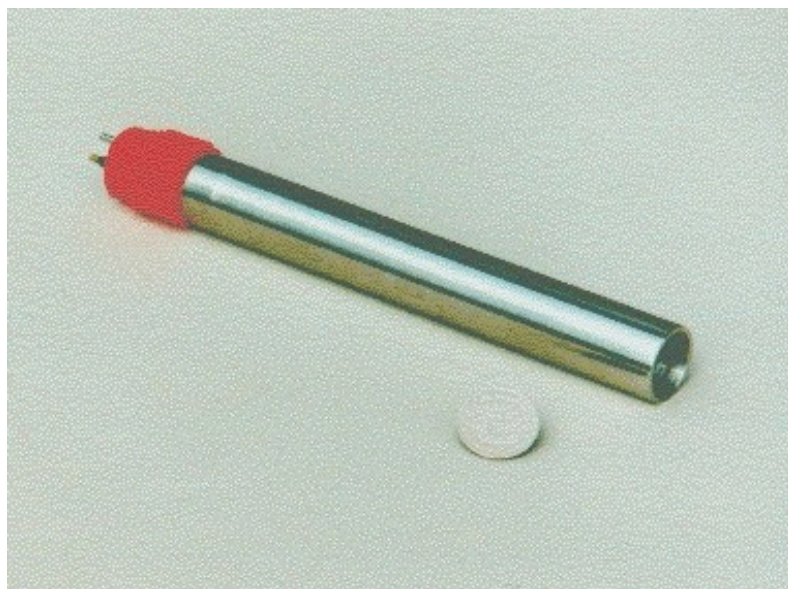

Supply Voltage Range:	6 – 24 V AC/DC	
Supply Current:	max. 80 mA	
Optical Power:	1mW, 3mW, 5 mW, 10mW	
Laser wave length:	655 nm (red)	
Dimensions:	30 mm diameter	260 mm length
Weight:	1000 g in air,	800 g in water
Housing material:	1.4571 (stainless steel 316)	
Connector:	Subcon BH2M, others are available	
Depth rating:	6,000 m	

Pressure test: 650 bar

Operating temperature range: - 20 °C to + 50 °C

Lifetime of Laserdiode: ~ 8000 h

WARNING:

Caution: Laser Radiation! Do not stare into beam!

The KULE laser pointer are build for use in unmanned underwater equipment only!